


Toothed lock washer

Spring steel


DIN 6797

Designation :

toothed lock washer, external teeth, for screw \varnothing M6, i.e. inside \varnothing 6,4 mm = DIN 6797 A - nom. 6.

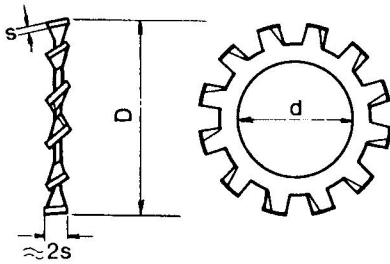

Type A
(external teeth)

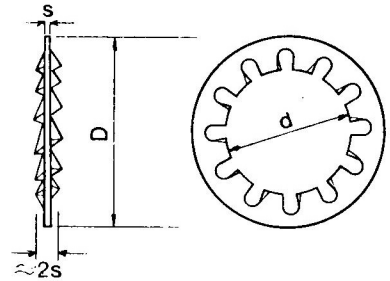

Type J
(internal teeth)

For screws	d	D	S	Weights in kg per 1000 p.		Packaging
				A	J	
M3	3,2	6	0,4	0,04	0,04	1000
M4	4,3	8	0,5	0,09	0,10	
M5	5,3	10	0,6	0,18	0,20	
M6	6,4	11	0,7	0,22	0,25	500
M8	8,4	15	0,8	0,45	0,55	200
M10	10,5	18	0,9	0,80	0,90	
M12	12,5	20,5	1	1,1	1,3	
M16	16,5	26	1,2	2,1	2,5	
M20	21	33	1,4	3,8	4,1	100
M24	25	38	1,5	6	6,5	

Execution :

trimmed off, in steel FSt - tolerance class DIN 522.