


DIN	913	914	915	916
ISO	4026	4027	4028	4029
	Flat point	Cone point	Dog point	Cup point

Designation :
 socket set screw, Ø 8 mm, normal metric thread and 16 mm full length L with cup point = DIN 916 M8 x 16.

	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
s	1,5	2	2,5	3	4	5	6	8	10	12	
d2	2	2,5	3,5	4	5,5	7	8,5	12	15	18	
Z2	x	1,2	1,5	1,5	1,7	2,5	2,7	3,5	4,5	5,5	
	y	2,5	3	3	3,5	5	5,5	7	9	11	
L mm	Weights in kg per 1000 pieces										
X	3	0,10									
	4	0,14	0,22								
	5	0,18	0,30								
	6	0,22	0,38	0,56							
Y	8	0,31	0,53	0,80	1,11	1,89					
	10	0,40	0,68	1,40	1,46	2,52	3,78				
	12	0,49	0,83	1,28	1,81	3,15	4,78				
	16	0,67	1,13	1,76	2,51	4,41	6,78	9,60			
	20	0,85	1,43	2,24	3,21	5,67	8,76	12,4	21,5	32,3	
	25			2,84	4,09	7,26	11,2	16,0	28,0	42,6	57,0
	30			3,44	4,97	8,85	13,7	19,6	34,6	52,9	72,0
	35				5,85	10,4	16,2	23,2	41,1	63,2	87,0
	40				6,73	12,0	18,7	26,8	47,7	73,5	102
	45				7,61	13,6	21,2	30,4	54,2	83,8	117
	50				8,49	15,2	23,7	34,0	60,8	94,1	132
	55							37,6	67,5	104,5	147
60							41,2	73,9	114,7	162	
Packaging	200				100			50		25	10

* Up to M10 included. From M12: 38 H.

Execution :
 A (formerly m) as per DIN 267/2

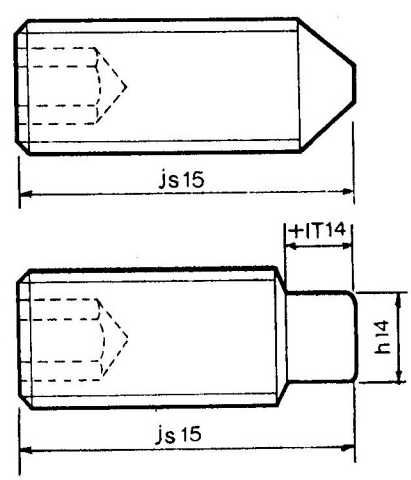

Thread :
 according to DIN 13 - tolerance class 6 g.

