


# Slotted lock nut for bearing

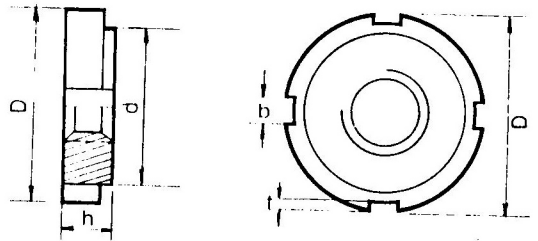

Steel 11H

DIN 981  
ISO 2982

**Designation :**

slotted lock nut, for bearing,  $\varnothing$  35 mm, fine metric thread, pitch 1,5 mm = DIN 981 KM7.

Code	d	D	h	b	t	Weight in kg per 100 p	Pack
KM0	M10 x 0,75	18	4	3	2	4	
KM1	M12 x 1	22	4	3	2	7	
KM2	M15 x 1	25	5	4	2	10	
KM3	M17 x 1	28	5	4	2	13	
KM4	M20 x 1	32	6	4	2	19	
KM5	M25 x 1,5	38	7	5	2	25	
KM6	M30 x 1,5	45	7	5	2	43	
KM7	M35 x 1,5	52	8	5	2	53	
KM8	M40 x 1,5	58	9	6	2,5	85	
KM9	M45 x 1,5	65	10	6	2,5	119	
KM10	M50 x 1,5	70	11	6	2,5	148	
KM11	M55 x 2	75	11	7	3	158	
KM12	M60 x 2	80	11	7	3	174	
KM13	M65 x 2	85	12	7	3	203	
KM14	M70 x 2	92	12	8	3,5	242	
KM15	M75 x 2	98	13	8	3,5	287	
KM16	M80 x 2	105	15	8	3,5	397	
KM17	M85 x 2	110	16	8	3,5	451	
KM18	M90 x 2	120	16	10	4	556	
KM19	M95 x 2	125	17	10	4	658	
KM20	M100 x 2	130	18	10	4	698	

**Execution :**

m as per DIN 267/2

**Thread :**

according to DIN 13/14 - tolerance class 5 H

N.B. : Special toothed lockwashers DIN 5406 for those nuts : on application.