


# self-locking nut, with nylon insert, standard type

Steel cl. 5 - cl. 6 - cl. 8  
Stainless steel

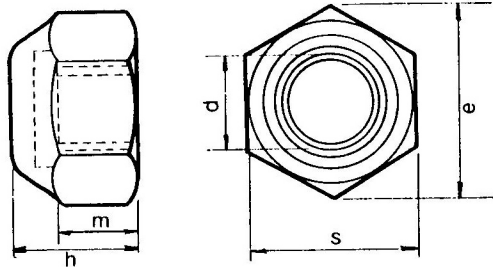

**DIN 985**

**Designation :**


self-locking nut, with nylon insert, standard type,  $\varnothing$  12 mm, normal metric thread = DIN 985 M12.

d	e	e	h	m	Weights in kg per % p.	Packaging	
M3	5,5	6,01	4	2,4	0,50	200	
M4	7	7,66	5	2,9	1,00		
M5	8	8,79	5	3,2	1,40		
M6	10	11,05	6	4	2,40		
M8	13	14,38	8	5,5	5,10		100
M10	17	18,90	10	6,5	10,6		
M12	19	21,10	12	8	17,2		
M14	22	24,49	14	9,5	26,0		
M16	24	26,75	16	10,5	34,0	50	
M18	27	29,56	18,5	13	45,0		
M20	30	32,95	20	14	65,0		
M22	32	35,03	22	15	75,0		
M24	36	39,55	24	15	100	25	
M27	41	45,02	27	17	162		
M30	46	50,85	30	19	212		
M33	50	55,37	33	22	317		
M36	55	60,79	36	25	415		
M39	60	66,44	39	27	499		
M42	65	72,09	42	29	628		
M45	70	76,95	45	32	771		
M48	75	82,6	48	36	998		

**Execution :**

A (formerly m)  $\leq$  M16 as per DIN ISO 4759/1

B (formerly mg)  $>$  M16 as per DIN ISO 4759/1



176

**Thread :**

according to DIN 13/12 & DIN 13/15 - tolerance class 6H.